

RubberBond™

ELEVATE

A revolutionary unitary surface with optimal safety ratings, and ultra-vibrant EPDM colors.

FALL PROTECTION

UNDER
400
HIC
at 12 feet

key features:

1 1/2" wear course

5" overall thickness

15lbs weight per square foot



Exceeds ASTM standards,
IPEMA certified, ADA accessible.



available in these standard colors:

elevating safe play surfaces to the highest level

This revolutionary hybrid bi-layer system combines the superior safety ratings of a loose-fill system, with the accessibility, durability and design options of a unitary system. RubberBond Elevate features a vibrant, brightly colored EPDM particulate blend that stays colorfast for years. Easily installs over a variety of substrates, saving on costly concrete or asphalt sub-bases.

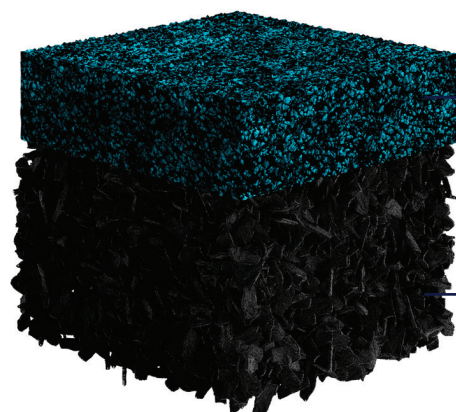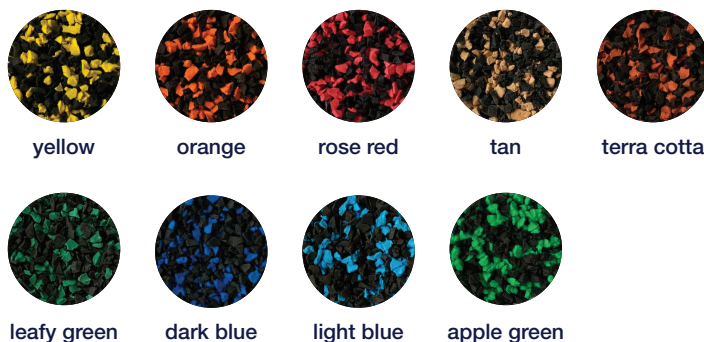

unitary bonded 1.5" EPDM top layer

vivid and durable EPDM
material is poured in place

3.5" rubber mulch under-layer

maximum shock-absorption,
performs over uneven terrain

| | RubberBond™ ELEVATE | Traditional Poured-in-Place |
|--------------------|------------------------|--------------------------------|
| WEAR COURSE | 1 1/2" | 3/8 - 1/2" |
| OVERALL THICKNESS | 5" | 2 - 3 1/2" |
| AVERAGE HIC RATING | 400 | 800+ |
| FALL HEIGHT RATING | 14" | 6 - 8" |
| WEIGHT PER SQ. FT. | 15 lbs | 5 - 7 lbs |
| WARRANTY | 7 yrs | 5 yrs |

RUBBERRECYCLE™